

# REMOVING THE LOCK 'N' ROLL

OPUS<sup>®</sup>  
OFF-ROAD



Allen Key:




Torque Wrench:



## Procedure:



### STEP 1:

Release the nut using an adjustable torque wrench.

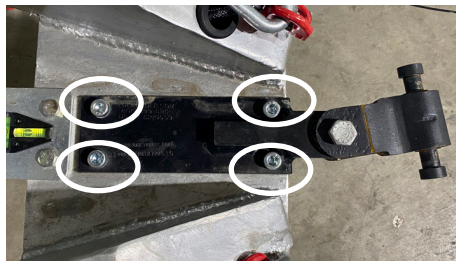

### STEP 2:

Using the Allen Key begin removing the bolts while holding the nut. To hold the nut use an adjustable torque wrench or a spanner.

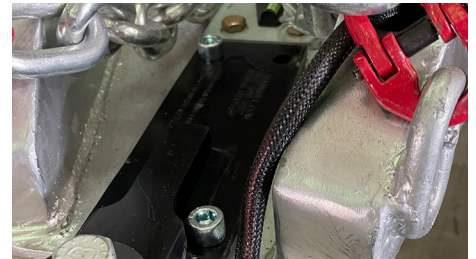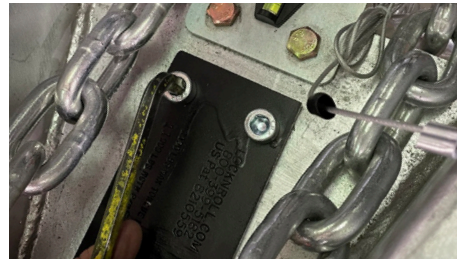

### STEP 3:

Once all 4 bolts are removed you can remove the hitch from the chasis.



OPUS Camper USA | [www.opuscamper.us](http://www.opuscamper.us) | [info@opuscamper.us](mailto:info@opuscamper.us) | 925.215.7315